


### Packing Quantity

| Package   | Tape Width (mm) | Reel Size (inch) | Reel Quantity | BOX Quantity | Carton Quantity |
|-----------|-----------------|------------------|---------------|--------------|-----------------|
| DFN2X2-6L | 8               | 7                | 3000          | 30000        | 120000          |


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

### Device Tape orientation Start and Finish Specification

| Package   | Tape Width (mm) | Tape Orientation                                                                  | Empty components at start (pockets)--close to the reel center | Empty components at finish (pockets)--close to the reel outside |
|-----------|-----------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------|
| DFN2X2-6L | 8               |  | 100                                                           | 50                                                              |


### Embossed carrier Tape specifications

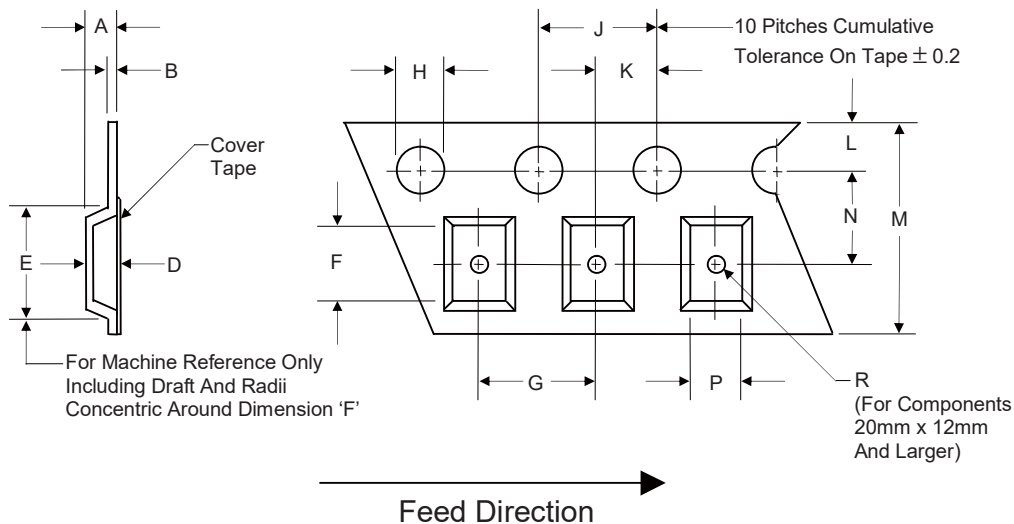

| Tape Width  | H    | L    | J    | B | D | F    | P    |
|-------------|------|------|------|---|---|------|------|
| 8mm         | 1.55 | 1.75 | 4.0  | / | / | 2.3  | 2.3  |
| (Tolerance) | ±0.1 | ±0.1 | ±0.1 | / | / | ±0.1 | ±0.1 |

| Tape Width  | E | R    | N    | A | K     | M | G    |
|-------------|---|------|------|---|-------|---|------|
| 8mm         | / | 1.0  | 3.5  | / | 2     | / | 4.0  |
| (Tolerance) | / | ±0.1 | ±0.1 | / | ±0.05 | / | ±0.1 |

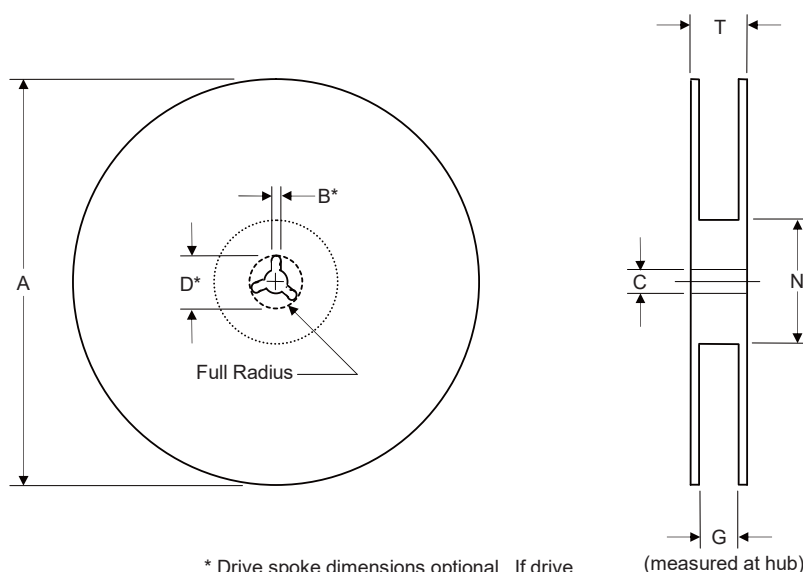


\* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

| Tape Width  | A    | B    | C | D | N    | G         | T    |
|-------------|------|------|---|---|------|-----------|------|
| 8mm         | 178  | 2.5  | / | / | 55   | 9         | 12.5 |
| (Tolerance) | ±2.0 | ±0.5 | / | / | ±1.0 | +1.5/-0.5 | ±1.0 |


### Dimensions

#### Inbox size

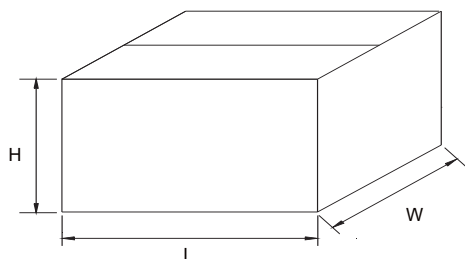

| Dimension | Specification(mm typical) |
|-----------|---------------------------|
|           | General                   |
| L         | 210                       |
| W         | 206                       |
| H         | 220                       |

#### Carton sizeFeed Direction

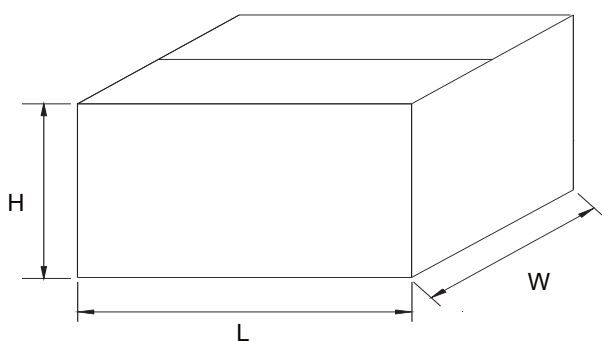

| Dimension | Specification(mm typical) |
|-----------|---------------------------|
|           | General                   |
| L         | 460                       |
| W         | 444                       |
| H         | 232                       |


### Packing Quantity

| Package   | Tape Width (mm) | Reel Size (inch) | Reel Quantity | BOX Quantity | Carton Quantity |
|-----------|-----------------|------------------|---------------|--------------|-----------------|
| DFN2X2-6L | 8               | 7                | 3000          | 30000        | 120000          |


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

### Device Tape orientation Start and Finish Specification


| Package   | Tape Width (mm) | Tape Orientation                                                                  | Empty components at start (pockets)--close to the reel center | Empty components at finish (pockets)--close to the reel outside |
|-----------|-----------------|-----------------------------------------------------------------------------------|---------------------------------------------------------------|-----------------------------------------------------------------|
| DFN2X2-6L | 8               |  | 100                                                           | 50                                                              |

### Embossed carrier Tape specifications

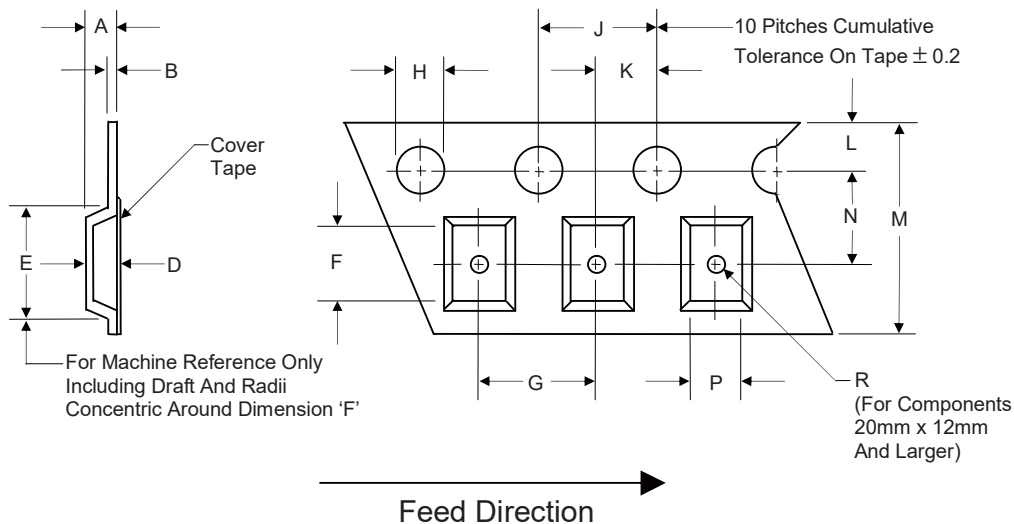

| Tape Width  | H    | L    | J    | B     | D | F    | P    |
|-------------|------|------|------|-------|---|------|------|
| 8mm         | 1.5  | 1.75 | 4.0  | 0.2   | / | 2.15 | 2.15 |
| (Tolerance) | ±0.1 | ±0.1 | ±0.1 | ±0.02 | / | ±0.1 | ±0.1 |

| Tape Width  | E    | R    | N    | A    | K | M    | G    |
|-------------|------|------|------|------|---|------|------|
| 8mm         | 2.55 | 1.0  | 3.5  | 1.08 | / | 8    | 4.0  |
| (Tolerance) | MIN  | ±0.1 | ±0.1 | ±0.1 | / | ±0.1 | ±0.1 |

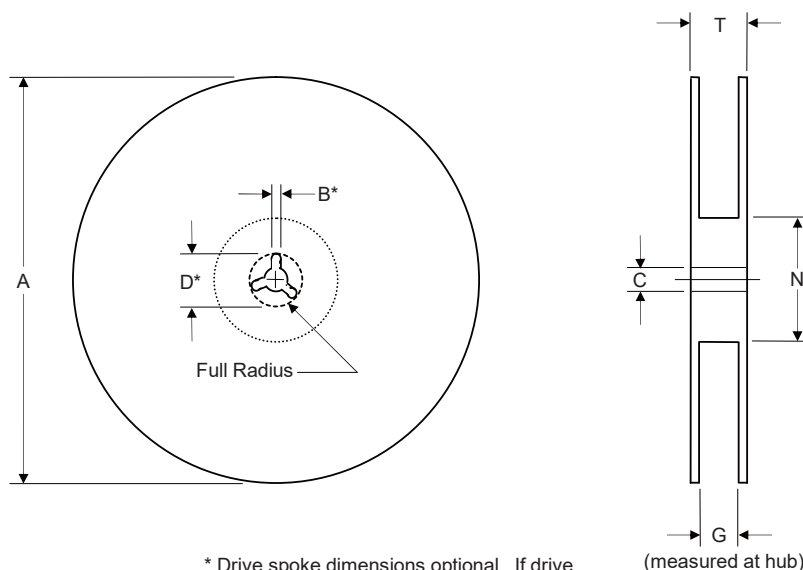


\* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

| Tape Width  | A    | B    | C    | D    | N    | G    | T    |
|-------------|------|------|------|------|------|------|------|
| 8mm         | 178  | 3.0  | 13.3 | 20   | 54   | 9.2  | 11.6 |
| (Tolerance) | ±1.0 | ±1.0 | ±0.3 | ±2.0 | ±0.5 | ±1.2 | ±1.4 |


### Dimensions

#### Inbox size

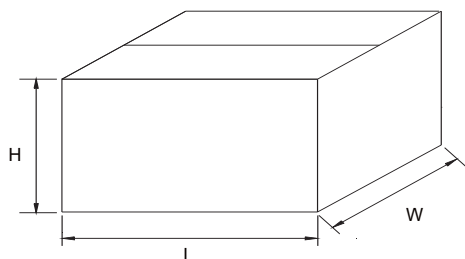

| Dimension | Specification(mm typical) |
|-----------|---------------------------|
|           | General                   |
| L         | 210                       |
| W         | 210                       |
| H         | 210                       |

#### Carton sizeFeed Direction

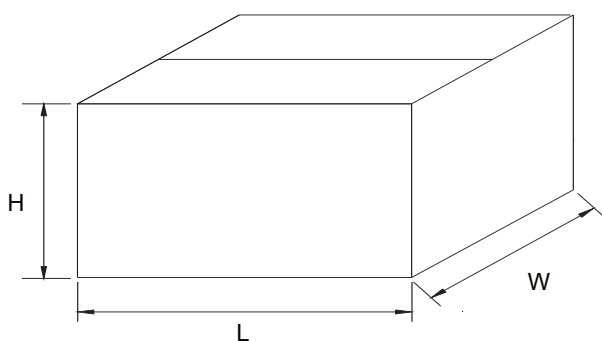

| Dimension | Specification(mm typical) |
|-----------|---------------------------|
|           | General                   |
| L         | 440                       |
| W         | 440                       |
| H         | 230                       |