


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
DFN3X3-8L	12	13	5000	10000	50000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
DFN3X3-8L	12		60	120


Embossed carrier Tape specifications

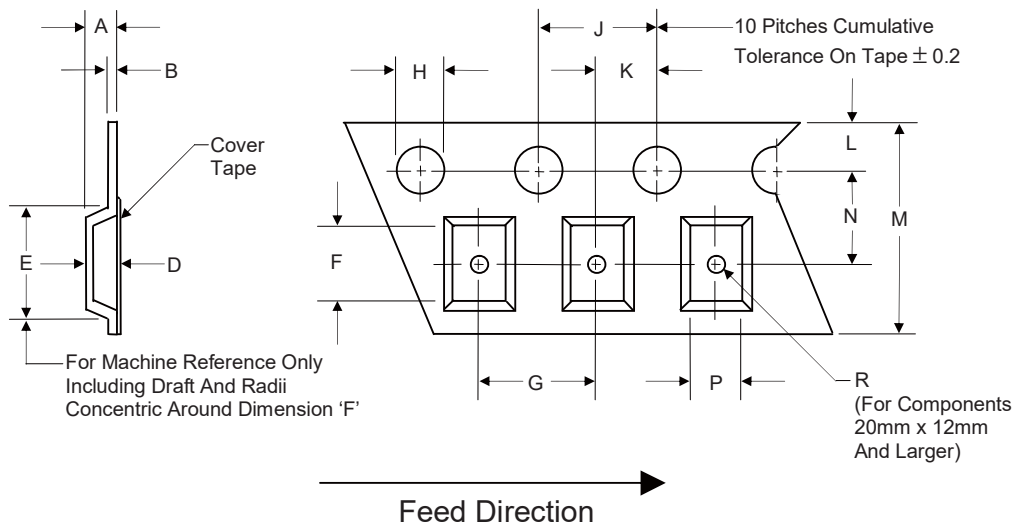

Tape Width	H	L	J	B	D	F	P
12mm	1.55	1.75	4.0	0.2	/	/	3.55
(Tolerance)	±0.10	±0.1	±0.1	±0.03	/	/	±0.1

Tape Width	E	R	N	A	K	M	G
12mm	3.45	1.55	5.5	1.13	2.0	12.0	8
(Tolerance)	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1

Surface Mount Reel Specifications

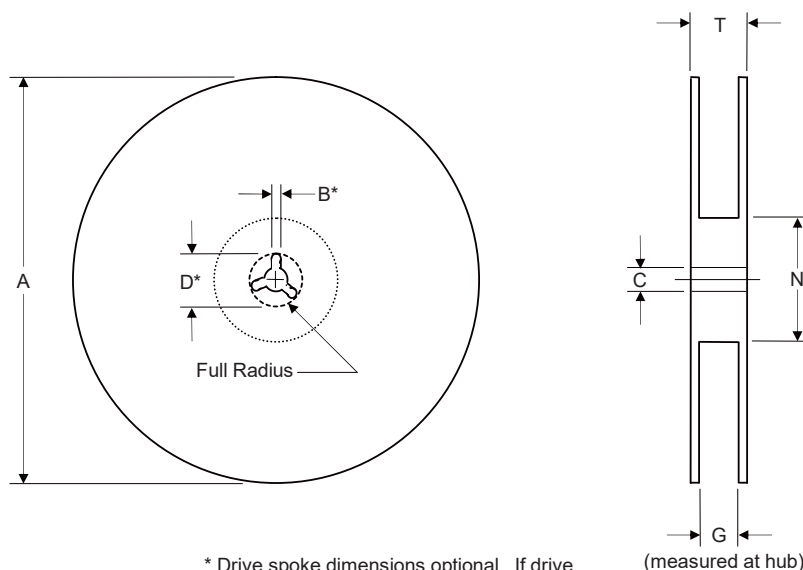


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
12mm	330	2.5	/	22.5	100	13.0	17.0
(Tolerance)	±1.0	±0.2	/	±1.0	±0.5	±0.3	±2.0


Dimensions

Inbox size

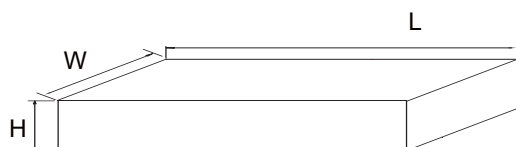

Dimension	Specification(mm typical)
	General
L	360
W	350
H	50

Carton sizeFeed Direction

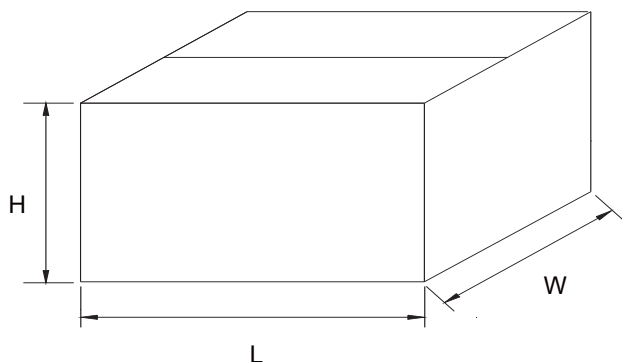

Dimension	Specification(mm typical)
	General
L	380
W	295
H	375


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
DFN3X3-8L	12	13	5000	10000	50000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
DFN3X3-8L	12		25	50


Embossed carrier Tape specifications

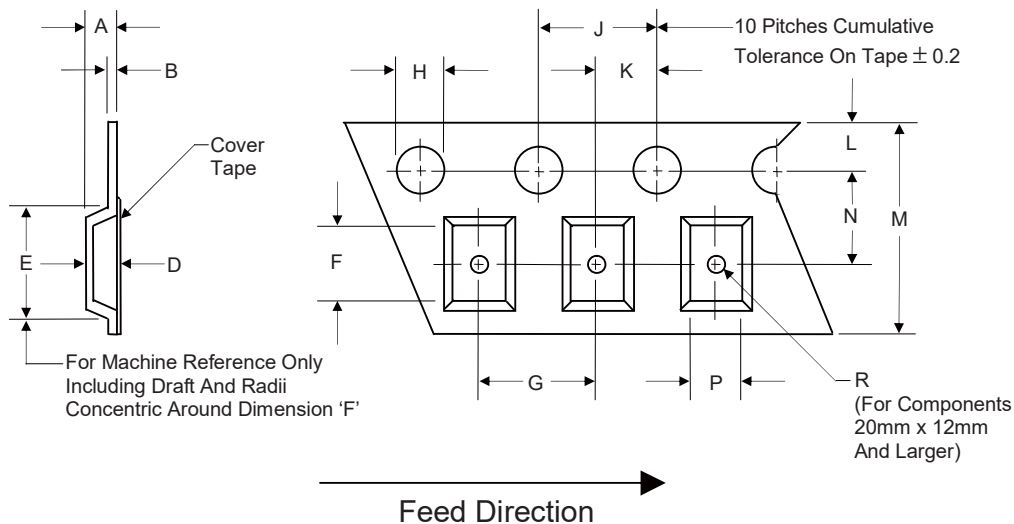

Tape Width	H	L	J	B	D	F	P
12mm	1.55	1.75	4.0	0.3	/	/	/
(Tolerance)	±0.05	±0.1	±0.1	±0.05	/	/	/

Tape Width	E	R	N	A	K	M	G
12mm	/	1.5	/	/	2.0	/	/
(Tolerance)	/	MIN	/	/	±0.1	/	/

Surface Mount Reel Specifications

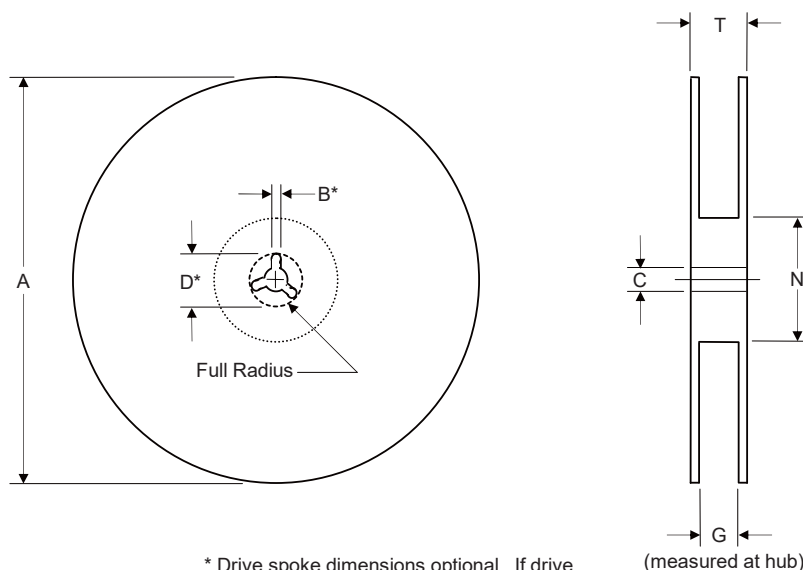


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
12mm	330	2.0	13.3	22	100	12.4	16.6
(Tolerance)	±2.0	±0.5	+0.5/-0.2	±0.5	±1.0	+2.0	/


Dimensions

Inbox size

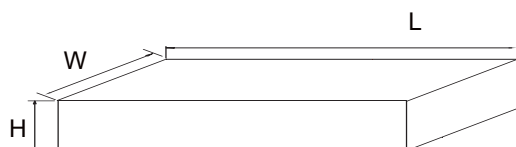

Dimension	Specification(mm typical)
	General
L	356
W	335
H	50

Carton sizeFeed Direction

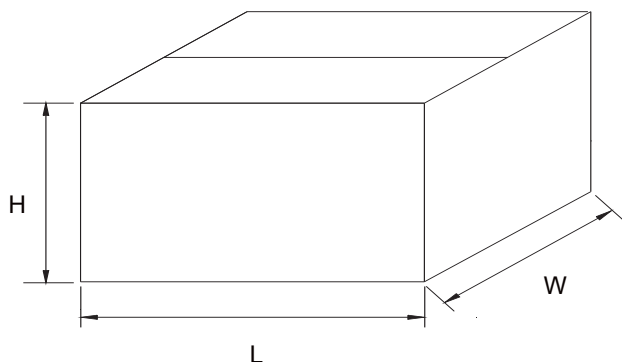

Dimension	Specification(mm typical)
	General
L	385
W	285
H	358


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
DFN3X3-8L	12	13	5000	10000	60000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
DFN3X3-8L	12		50	30


Embossed carrier Tape specifications

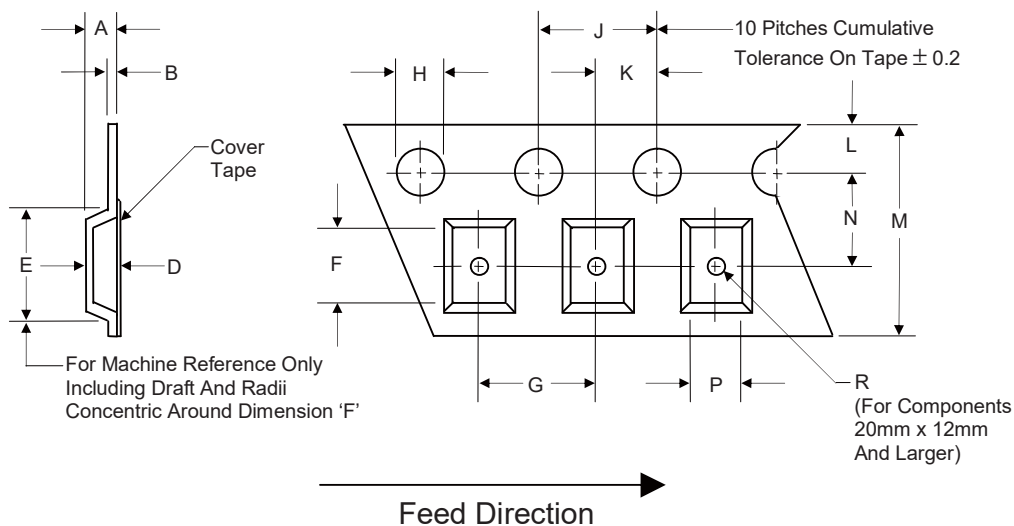

Tape Width	H	L	J	B	D	F	P
12mm	1.5	1.75	4.0	0.23	/	3.3	3.3
(Tolerance)	±0.1	±0.1	±0.1	±0.02	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
12mm	3.7	1.5	5.5	1.02	/	8.0	8.0
(Tolerance)	MIN	±0.1	±0.1	±0.15	/	±0.1	±0.1

Surface Mount Reel Specifications

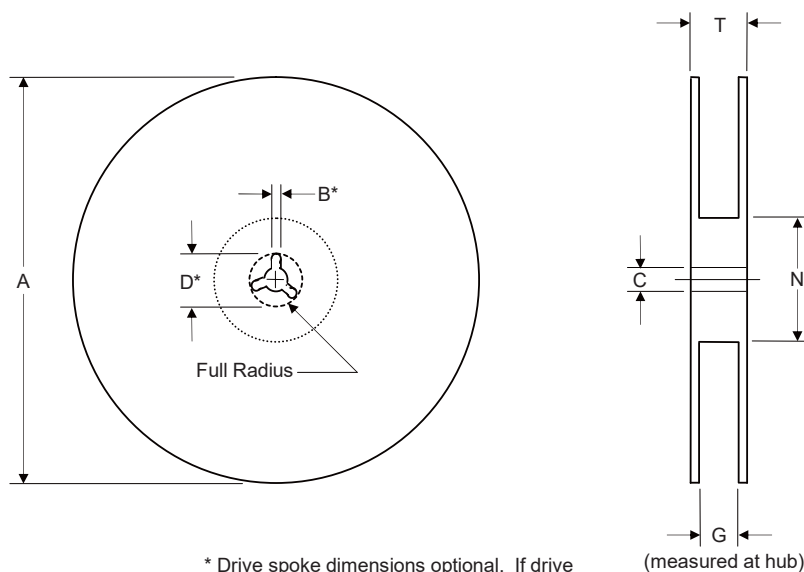


* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
12mm	330	3.0	/	/	100	12.8	17.2
(Tolerance)	±2.0	±1.0	/	/	±0.5	±0.5	±1.2


Dimensions

Inbox size

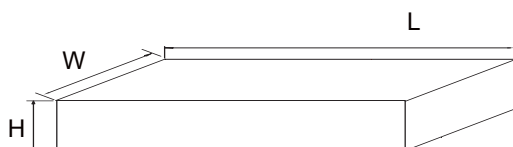

Dimension	Specification(mm typical)
	General
L	355
W	345
H	60

Carton sizeFeed Direction

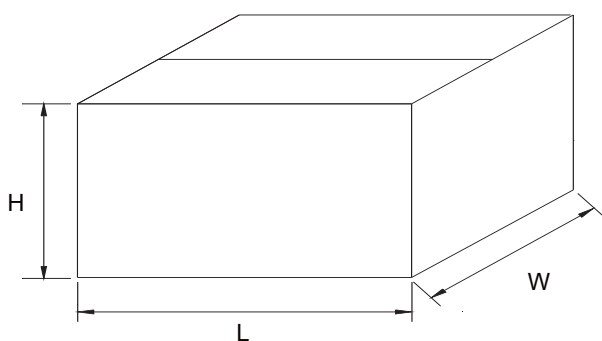

Dimension	Specification(mm typical)
	General
L	390
W	375
H	360


Packing Quantity

Package	Tape Width (mm)	Reel Size (inch)	Reel Quantity	BOX Quantity	Carton Quantity
DFN3X3-8L	12	13	5000	10000	60000


Note 1: These are minimum package quantities only. Minimum orders will differ. Contact the factory for more information on minimum order quantities.

Note 2: GOFORD Tape&reel products meets EIA-481 REV D specification.

Device Tape orientation Start and Finish Specification

Package	Tape Width (mm)	Tape Orientation	Empty components at start (pockets)--close to the reel center	Empty components at finish (pockets)--close to the reel outside
DFN3X3-8L	12		50	50


Embossed carrier Tape specifications

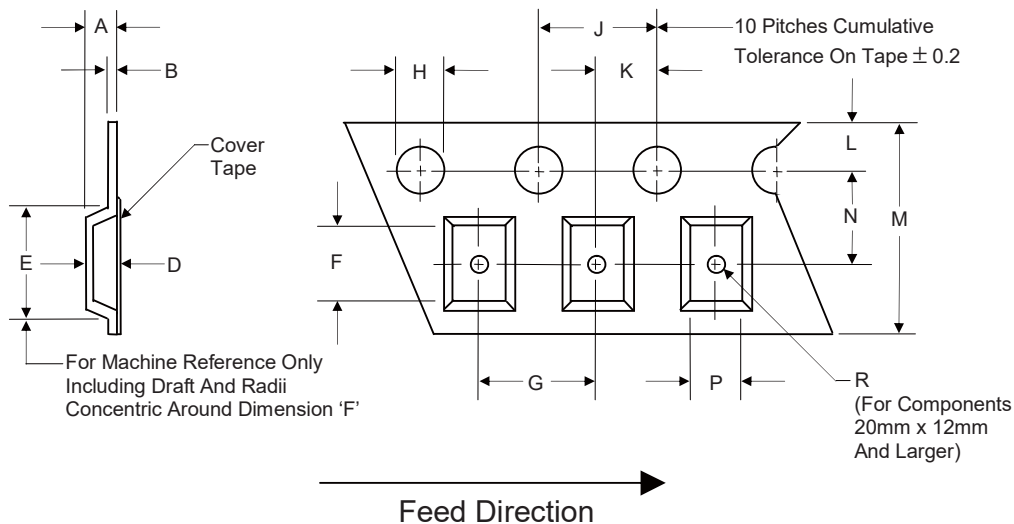

Tape Width	H	L	J	B	D	F	P
12mm	1.5	1.75	4.0	/	/	3.35	3.35
(Tolerance)	+0.1	±0.1	±0.1	/	/	±0.1	±0.1

Tape Width	E	R	N	A	K	M	G
12mm	/	1.5	5.5	/	2	12.0	8.0
(Tolerance)	/	+0.25	±0.05	/	±0.05	+0.2-0.1	±0.1

Surface Mount Reel Specifications

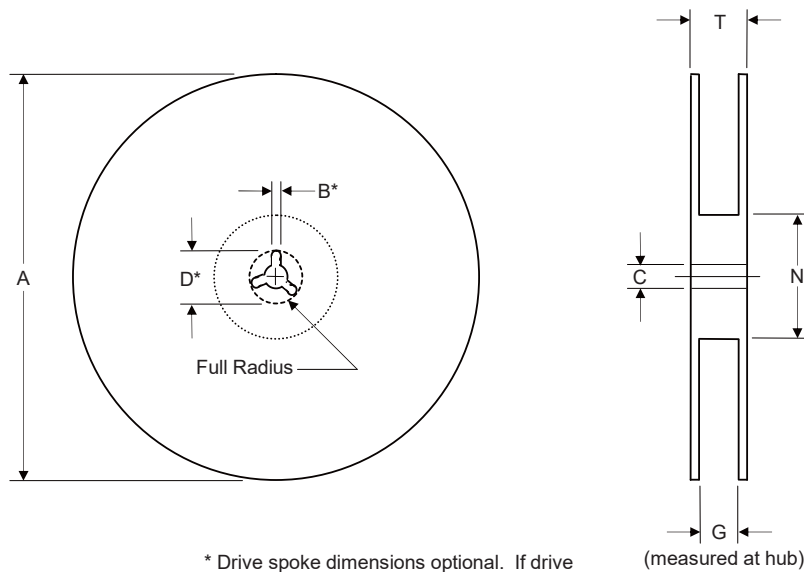

* Drive spoke dimensions optional. If drive spoke is used then asterisked dimensions apply.

Tape Width	A	B	C	D	N	G	T
12mm	330	2.8	2.8	22.5	100	13.2	17.2
(Tolerance)	±2.0	±2.0	±0.2	±0.5	±0.5	+3-1	±0.2


Dimensions

Inbox size



Dimension	Specification(mm typical)
	General
L	365
W	360
H	60

Carton sizeFeed Direction

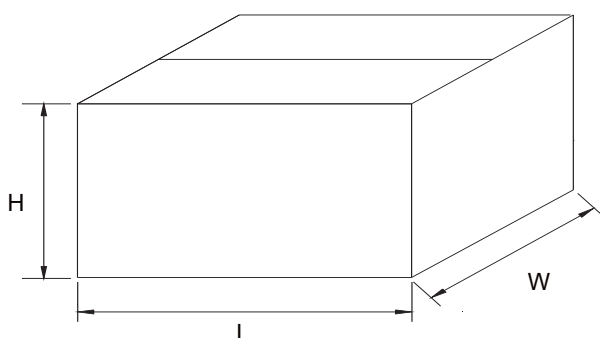

Dimension	Specification(mm typical)
	General
L	520
W	386
H	385