

## P-Channel Enhancement Mode Power MOSFET

<p><b>Description</b></p> <p>The GT880P15D5 uses advanced trench technology to provide excellent <math>R_{DS(ON)}</math>, low gate charge. It can be used in a wide variety of applications.</p> <p><b>General Features</b></p> <ul style="list-style-type: none"> <li>● <math>V_{DS}</math> -150V</li> <li>● <math>I_D</math> (at <math>V_{GS} = -10V</math>) -30A</li> <li>● <math>R_{DS(ON)}</math> (at <math>V_{GS} = -10V</math>) &lt; 90mΩ</li> <li>● <math>R_{DS(ON)}</math> (at <math>V_{GS} = -4.5V</math>) &lt; 120mΩ</li> <li>● 100% Avalanche Tested</li> <li>● RoHS Compliant</li> </ul> <p><b>Application</b></p> <ul style="list-style-type: none"> <li>● Power switch</li> <li>● DC/DC converters</li> </ul>	<p>Schematic diagram</p> <p>pin assignment</p> <p>DFN5X6-8L</p>
------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------

### Ordering Information

Device	Package	Marking	Packaging
GT880P15D5	DFN5X6-8L	GT880P15	5000pcs/Reel

### Absolute Maximum Ratings $T_C = 25^\circ\text{C}$ , unless otherwise noted

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DS}$	-150	V
Continuous Drain Current $T_C = 25^\circ\text{C}$	$I_D$	-30	A
$T_C = 100^\circ\text{C}$		-19	
Pulsed Drain Current (note1)	$I_{DM}$	-120	A
Gate-Source Voltage	$V_{GS}$	$\pm 20$	V
Power Dissipation	$P_D$	138	W
Single pulse avalanche energy (note2)	$E_{AS}$	156	mJ
Operating Junction and Storage Temperature Range	$T_J, T_{stg}$	-55 To 150	°C

### Thermal Resistance

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Ambient	$R_{thJA}$	50	°C/W
Maximum Junction-to-Case	$R_{thJC}$	0.9	°C/W

**Specifications**  $T_J = 25^\circ\text{C}$ , unless otherwise noted

Parameter	Symbol	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
<b>Static Parameters</b>						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = -250\mu\text{A}$	-150	--	--	V
Zero Gate Voltage Drain Current	$I_{\text{DSS}}$	$V_{\text{DS}} = -150\text{V}, V_{\text{GS}} = 0\text{V}$	--	--	-1	$\mu\text{A}$
Gate-Source Leakage	$I_{\text{GSS}}$	$V_{\text{GS}} = \pm 20\text{V}$	--	--	$\pm 100$	nA
Gate-Source Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = -250\mu\text{A}$	-1.0	-2.0	-3.0	V
Drain-Source On-Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = -10\text{V}, I_D = -15\text{A}$	--	82	90	$\text{m}\Omega$
		$V_{\text{GS}} = -4.5\text{V}, I_D = -15\text{A}$	--	94	120	
Forward Transconductance	$g_{\text{FS}}$	$V_{\text{DS}} = -5\text{V}, I_D = -15\text{A}$	--	31	--	S
<b>Dynamic Parameters</b>						
Input Capacitance	$C_{\text{iss}}$	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = -75\text{V}, f = 1.0\text{MHz}$	--	3350	--	$\text{pF}$
Output Capacitance	$C_{\text{oss}}$		--	145	--	
Reverse Transfer Capacitance	$C_{\text{rss}}$		--	6	--	
Total Gate Charge	$Q_g$	$V_{\text{DD}} = -75\text{V}, I_D = -15\text{A}, V_{\text{GS}} = -10\text{V}$	--	46	--	$\text{nC}$
Gate-Source Charge	$Q_{\text{gs}}$		--	9	--	
Gate-Drain Charge	$Q_{\text{gd}}$		--	5	--	
Turn-on Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = -75\text{V}, I_D = -15\text{A}, R_G = 1.6\Omega$	--	62	--	$\text{ns}$
Turn-on Rise Time	$t_r$		--	17	--	
Turn-off Delay Time	$t_{\text{d}(\text{off})}$		--	68	--	
Turn-off Fall Time	$t_f$		--	29	--	
<b>Drain-Source Body Diode Characteristics</b>						
Continuous Body Diode Current	$I_S$	$T_C = 25^\circ\text{C}$	--	--	-30	A
Body Diode Voltage	$V_{\text{SD}}$	$T_J = 25^\circ\text{C}, I_{\text{SD}} = -15\text{A}, V_{\text{GS}} = 0\text{V}$	--	--	-1.2	V
Reverse Recovery Charge	$Q_{\text{rr}}$	$I_F = -15\text{A}, V_{\text{GS}} = 0\text{V}$ $dI/dt = -100\text{A}/\mu\text{s}$	--	362	--	$\text{nC}$
Reverse Recovery Time	$T_{\text{rr}}$		--	88	--	ns

**Notes**


1. Repetitive Rating: Pulse width limited by maximum junction temperature

2. EAS condition :  $T_J=25^\circ\text{C}$ ,  $V_{\text{DD}}=-50\text{V}$ ,  $V_{\text{GS}}=-10\text{V}$ ,  $L=0.5\text{mH}$ ,  $R_g=25\Omega$


The table shows the minimum avalanche energy, which is 420mJ when the device is tested until failure

3. Identical low side and high side switch with identical  $R_g$


Gate Charge Test Circuit

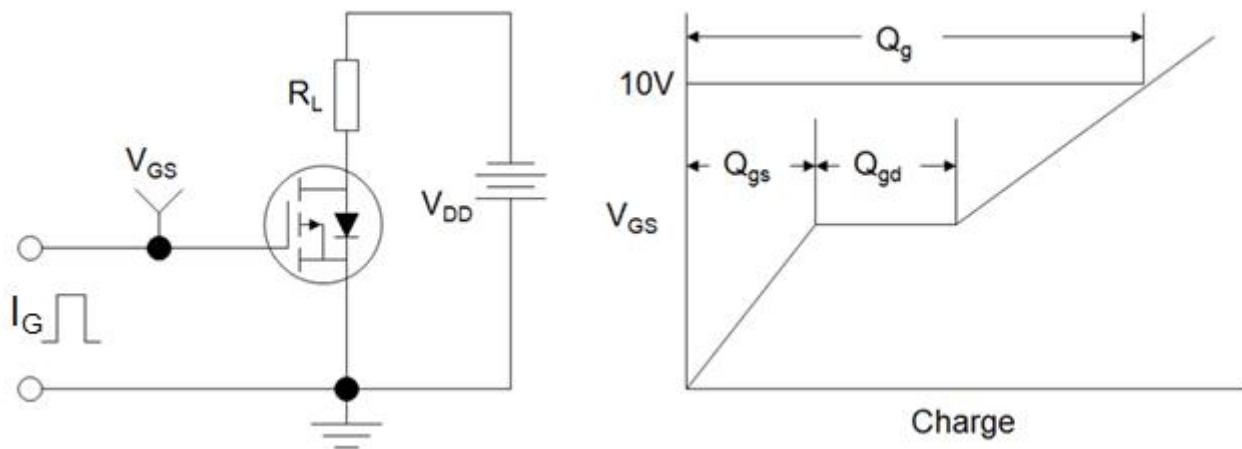

Switch Time Test Circuit

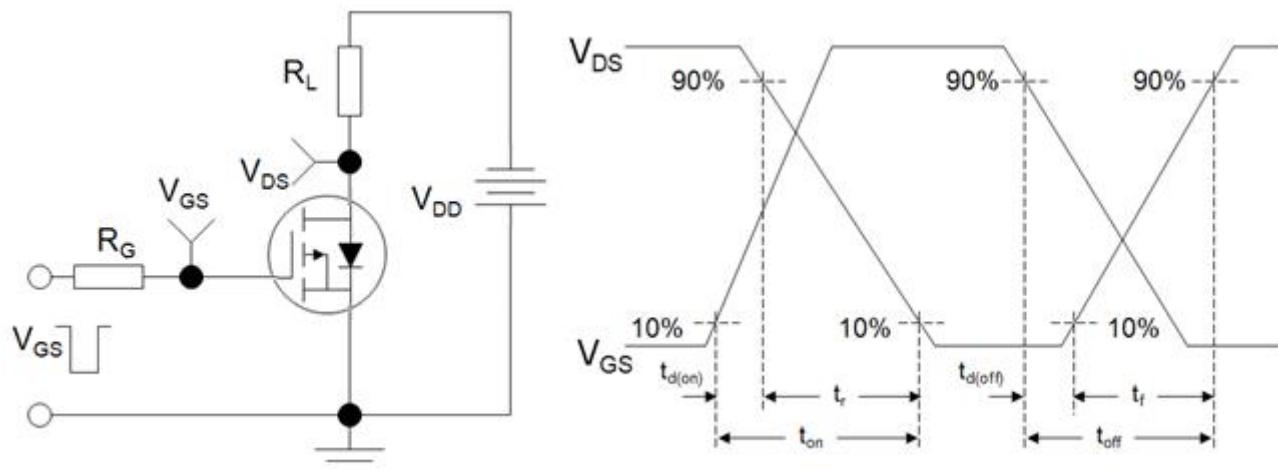


EAS Test Circuit

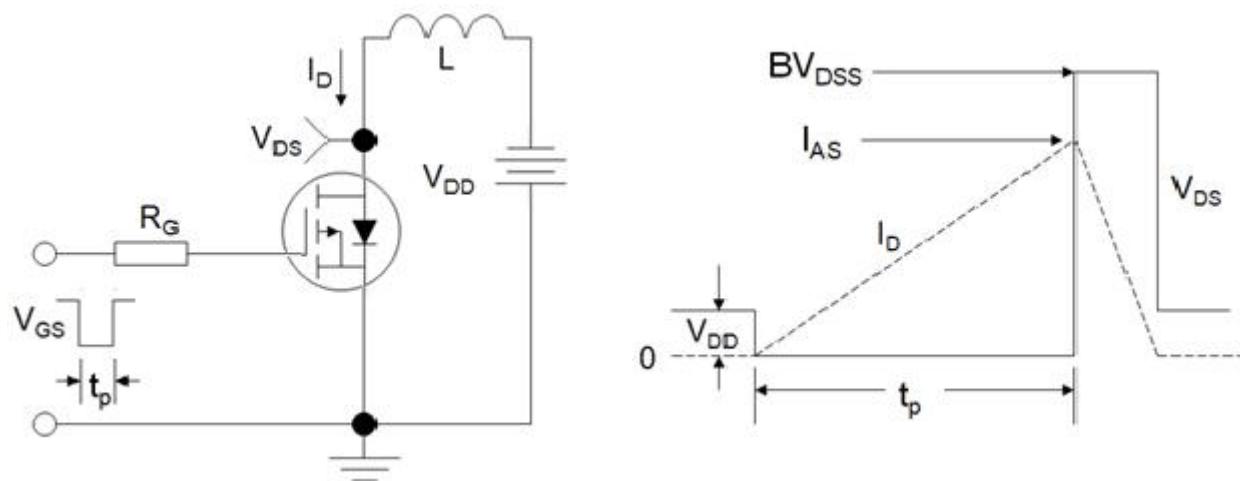


**Typical Characteristics**  $T_J = 25^\circ\text{C}$ , unless otherwise noted


**Figure 1. Output Characteristics**

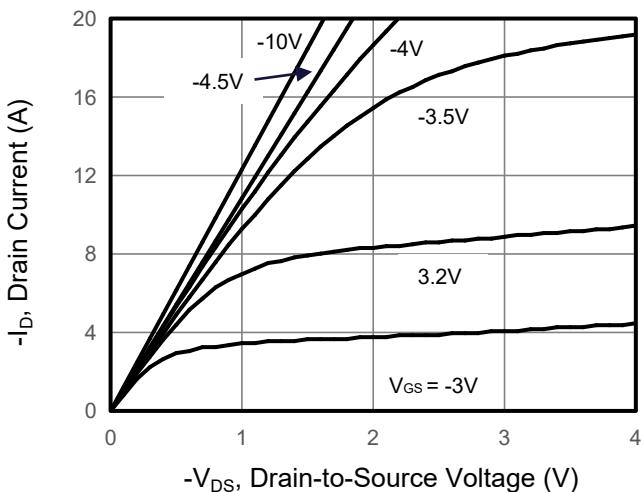


**Figure 2. Transfer Characteristics**

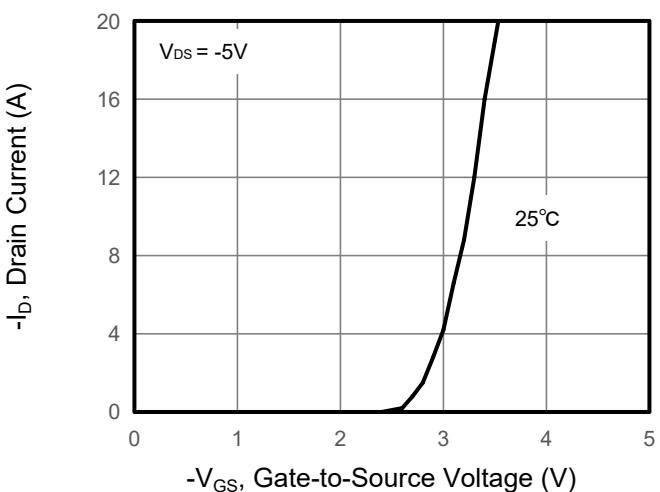


**Figure 3. Drain Source On Resistance**

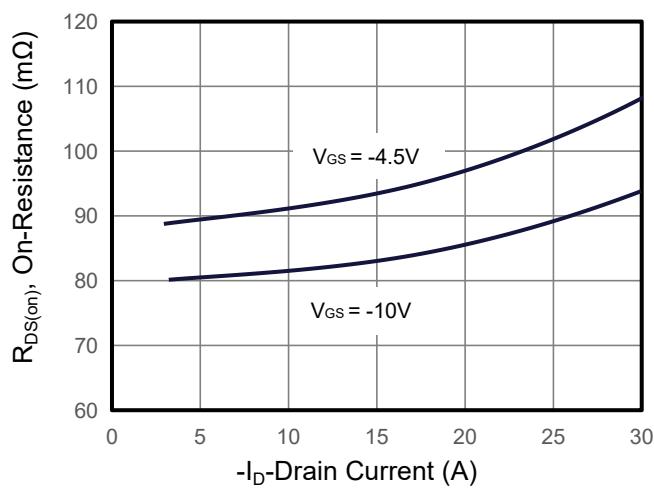


**Figure 4. Gate Charge**

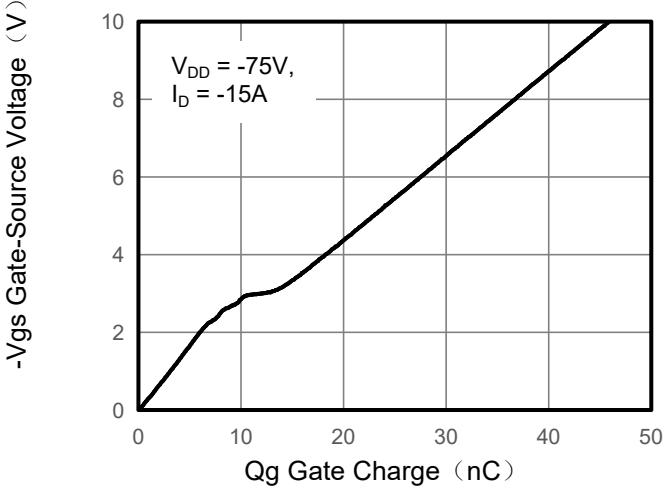

**Figure 5. Capacitance**

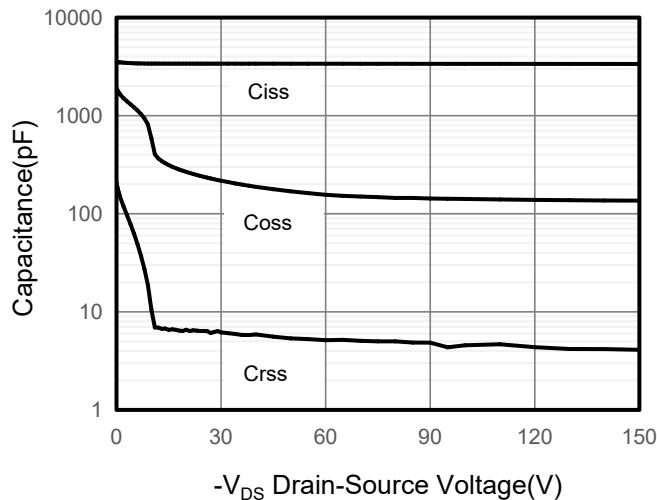


**Figure 6. Source-Drain Diode Forward**

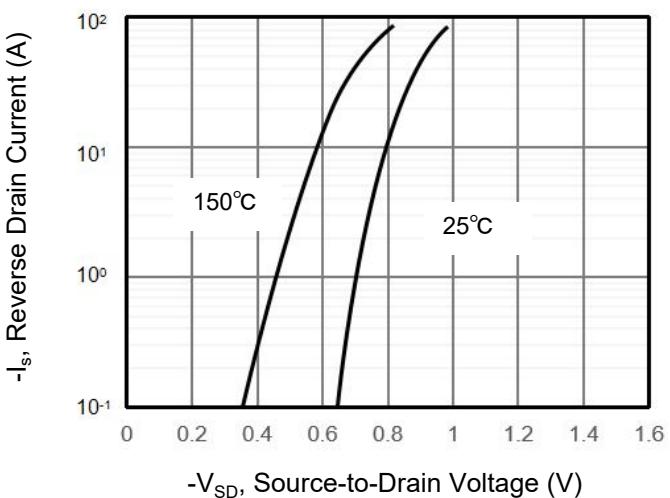


**Typical Characteristics**  $T_J = 25^\circ\text{C}$ , unless otherwise noted


**Figure 7. Drain-Source On-Resistance**

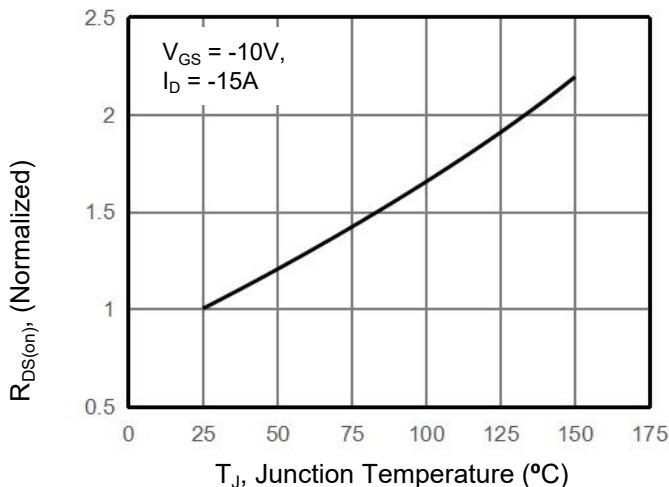


**Figure 8. Safe Operation Area**




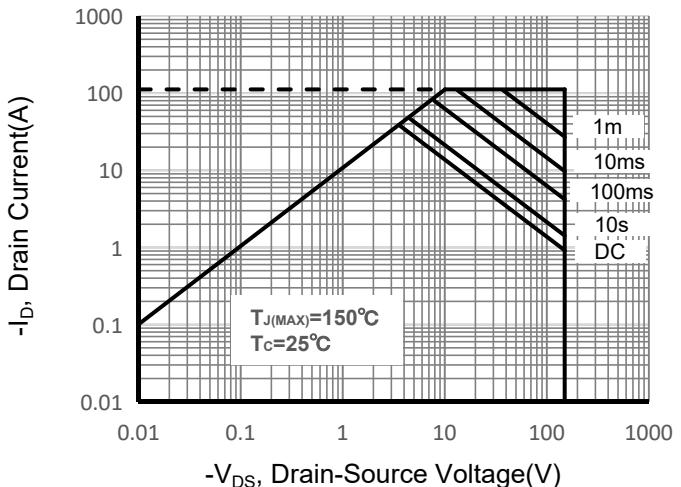


**Figure 9. Maximum Continuous Drain Current vs Case Temperature**

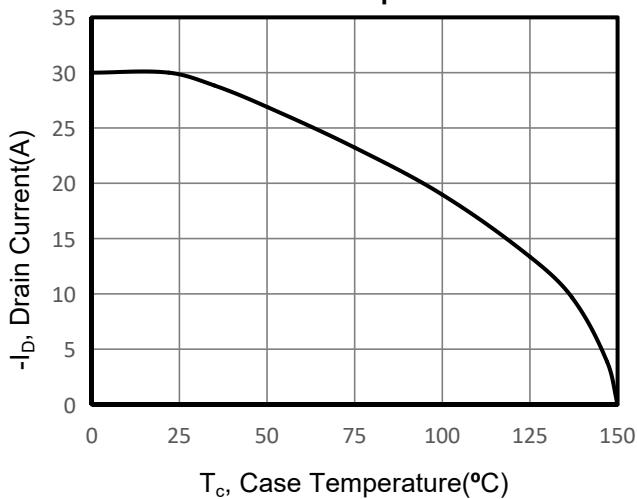

**Figure 10. Normalized Maximum Transient Thermal Impedance**

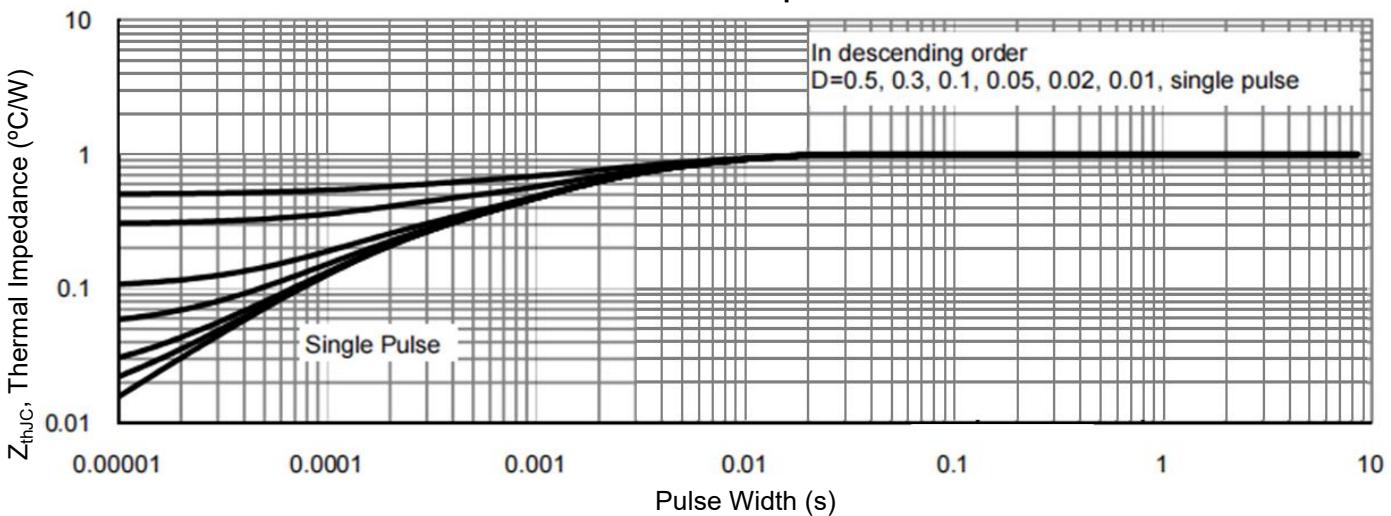

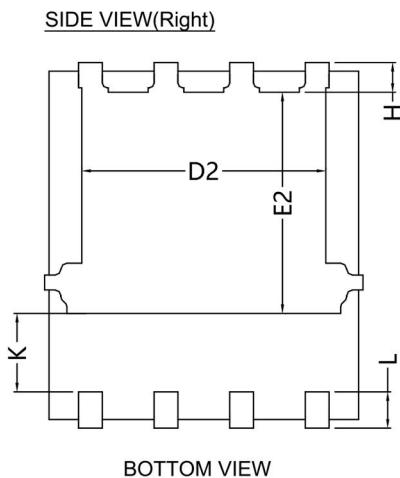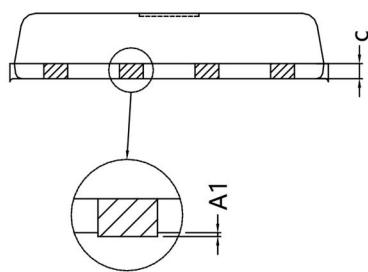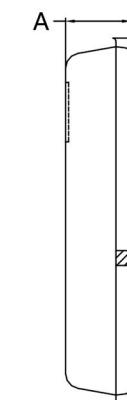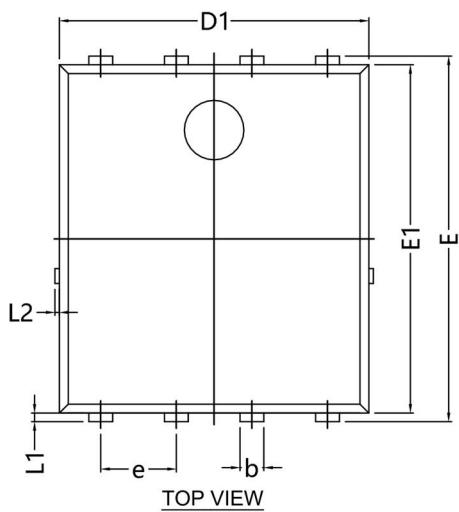**DFN5X6-8L Package Information**SIDE VIEW(Front)BOTTOM VIEW

DIM. SYMBOL	MILLIMETERS		
	MIN.	NOM.	MAX.
A	1.00	1.10	1.20
A1	0	---	0.05
b	0.30	0.40	0.50
c	0.20	0.25	0.30
D1	5.10	5.20	5.30
D2	3.90	4.10	4.25
E	6.00	6.15	6.30
E1	5.76	5.86	5.96
E2	3.52	3.72	3.92
e	1.27 BSC		
H	0.40	0.50	0.60
L	0.50	0.61	0.71
L1	0.05	0.15	0.25
L2	0.02	0.08	0.15
K	1.10	---	---